



Collision Detection for Complex Environments

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen



What is Collision Detection

Finding coincident geometry

- e.g. what polygons intersect in this environment

Detection by object

- Don't care about collisions among an object's polygons
- Choice of "what is an object" somewhat arbitrary

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen



Applications

Motion planning

- Compute collision-free paths for automated tasks

Virtual prototyping / simulation

- Test functionality of mechanical assemblies

Computer animation

- Physically-based animations

Virtual environments

- Detect interactions of user with environment
- Determine interactions among virtual objects

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen



Triangle-Triangle Intersection

Intersect if edge of one triangle intersects other triangle

- 6 such tests produces complete tri-tri test
- Faster methods possible

—see Moller, "A Fast Triangle-Triangle Intersection Test", *Journal of Graphics Tools*, 2(2), 1997.

Edge-triangle intersection

- Find intersection of line and plane
- Check if intersection is within edge
- Check if intersection is within triangle

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen



Testing Complex Models


Bounding volume hierarchies

- **Spheres, axis-aligned bounding boxes, oriented bounding boxes**
 - simple volume have faster tests, but may require more tests than complex volumes (even asymptotically more)
- **Construct hierarchy for each object**
- **Prune out unnecessary collision tests**
 - if two bounding volumes do not collide, their children do not collide


Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen




Bounding Volume Examples




Sphere



Axis-Aligned Bounding Box




Oriented Bounding Box




General Slab Intersection



Bounding Volume Hierarchy Example

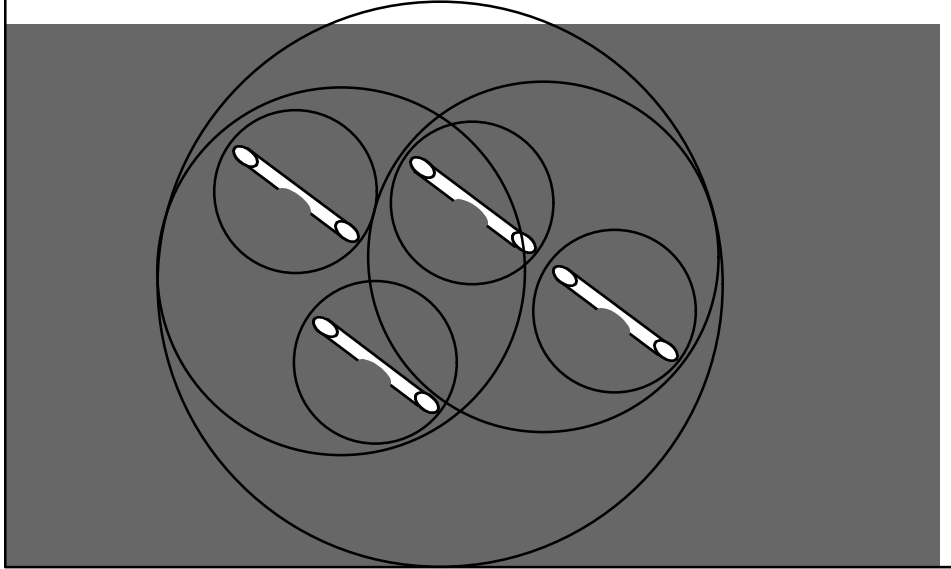

Bounding Volume Hierarchy

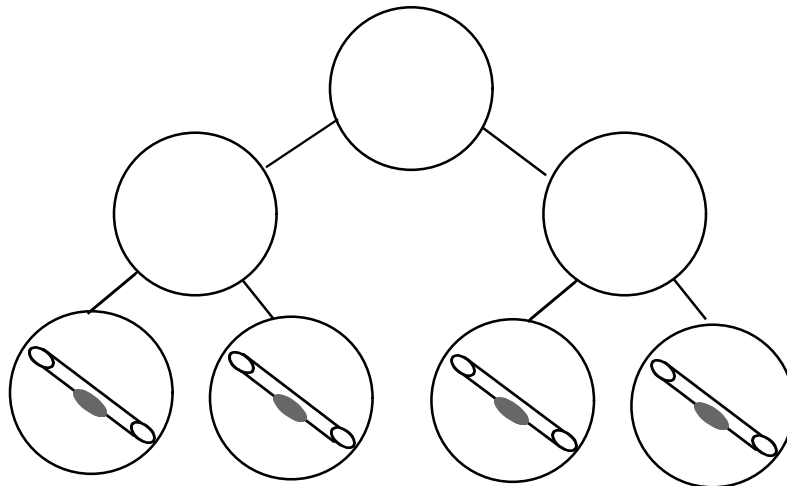

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen



Computing Hierarchies

Top-down

Bottom-up


Minimize volume/surface area

Computing “good” hierarchies is difficult

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen



Bounding Volume Test Trees

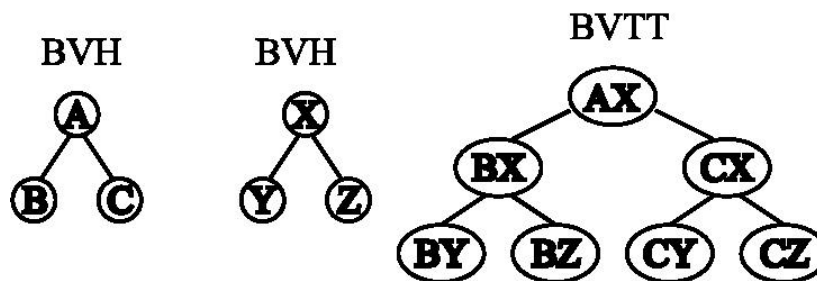

Indicate order of traversing a pair of bounding volume hierarchies

Not generally represented explicitly

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen



Cost of Proximity Queries

$$T = N_{bv} \times C_{bv} + N_p \times C_p$$

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen



Video

Gottschalk, Lin, Manocha. “OBB-Tree: A Hierarchical Structure for Rapid Interference Detection.” *Proceedings of SIGGRAPH 96*.

- **Top-down method of OBB tree construction**
- **Fast OBB-OBB overlap test with separating axis theorem**
- **OBB trees *asymptotically faster* than sphere or AABB trees for parallel close proximity**

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen



N-body Collision Detection

Given n moving objects and m stationary objects, find all pairs of intersecting objects.

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen



Goals

Speed

- **want algorithm to be output sensitive, something like $O(n+s)$**

Accuracy

- **accuracy to the precision of the models**

Assumptions

- **temporal coherence**
- **no assumptions about accelerations or velocities of objects, except that sampling rate is high enough to detect collisions**

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen



Worst Case Complexity

Assuming none of the stationary objects are intersecting each other (or we are not concerned with these intersections), worst case output size:

$$s = O(n^2 + nm)$$

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen



Space Partitioning Approaches

Partition space into small units.

Only test for collisions between objects in each of these units.

Examples

- **Uniform Spatial Subdivision**
- **Octrees**
- **K-d trees, R-trees, etc.**

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen



Uniform Spatial Subdivision

Partition space into a large number of boxes.

Decide which boxes each object falls into.

Only test for collisions between pairs of objects in each box.

Very simple.

Very memory intensive.

Difficult/impossible to choose proper box size.

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen



Octree

Start with all of space in a single cube.

Recursively subdivide cube into 8 equal sub-cubes until either the cube contains fewer than a set number of objects or the level of recursion reaches some maximum.

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen



Octree (cont.)

Cell size adapts to arrangement of objects in the environment.

Memory used more efficiently than uniform spacial subdivision, but may still be wasteful.

Still difficult to choose cutoff sizes.

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen



Object Sorting

Sort objects in space to determine which object pairs overlap.

Test only these pairs for collisions.

(methods for determining overlaps and testing collisions are often independent).

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen




Dimension Reduction

- project bounding boxes of objects onto planes or lines
- “sort” in lower-dimensional space
- determine overlaps in lower-dimensional space
- overlap in all lower-dimensional spaces indicates overlap in the higher dimensional space

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen



Dimension Reduction (2D)

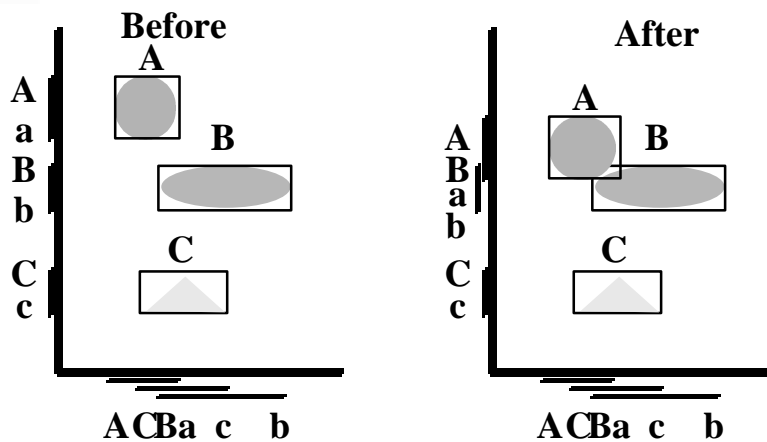

Box A moves to overlap box B

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen



Bounding Boxes

Conservatively-sized cubes

- Shape invariant for object rotations

Arbitrary AABBs for tighter fit

- Update incrementally as objects rotate

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen



Fast Bounding Box Updates

Convex objects

- Use local walk to update extremal vertices

Non-convex objects

- Precompute convex hull or other tight, convex bounding volume
- Apply incremental walk to bounding volume

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen



List Sorting

- Use temporal coherence
- Typically sort in $O(n)$ time
- Each swap toggles a 1D overlap status

Advantage - simple and efficient

Disadvantage - many swaps/overlaps in 1D

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen



Range Queries in 2D and 3D

Interval/Segment Trees

- $O(n \log n)$ to construct
- Each query $O(\log n)$
- Inserting/Deleting a range $O(\log n)$

Advantage - fewer overlaps in higher dimensions

Disadvantage - more complex structures, with larger overhead (constant factors matter)

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen



I-Collide


Collision detection for convex polyhedra

- Tracks pair-wise closest distances
- Reports distance and collisions
- Performs exact collision tests
- Sub-linear in terms of object complexity
- Output sensitive in terms of number of objects
- Fast in practice

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen




System Architecture

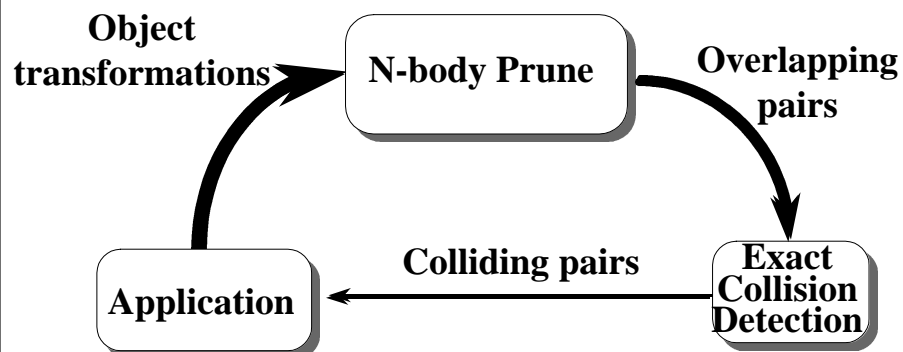

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen



Multi-body simulation

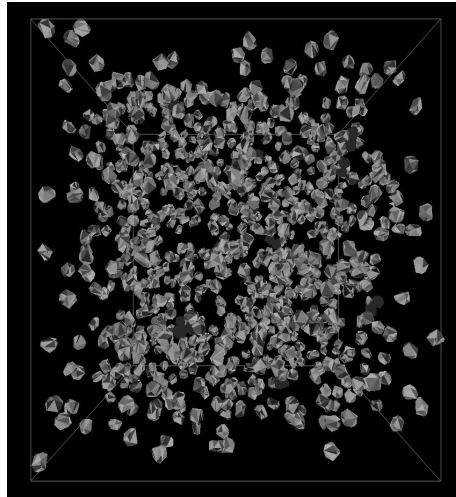

1000 moving polyhedra

**Runs at over 15 frames
per second on Onyx RE
R4400**

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen



I_COLLIDE Results

**Fairly linear with respect to number of
objects and object/volume density**

**N-body simulation with 500 objects runs at
about 30 frames/sec (without graphics).**

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen



V-Collide


Collision detection for large polygonal environments

- **Combines I-Collide pruning algorithm with RAPID intersection test**
- **Provides efficient collision detection for n arbitrary polygonal models**
- **Improves space efficiency over I-Collide implementation**

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen



Multi-bunny Simulation

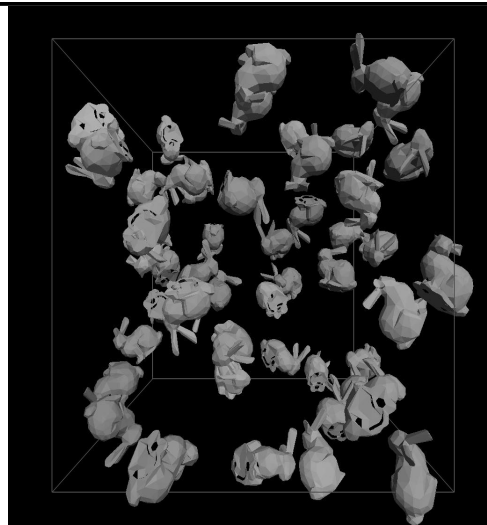

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen



Video

Cohen, Lin, Manocha, and Ponamgi.
**“I-COLLIDE: An Interactive and Exact
Collision Detection System for Large-Scale
Environments.”** *Proceedings of 1995
Symposium on Interactive 3D Graphics.*

Johns Hopkins Department of Computer Science
Course 600.460: Virtual Worlds, Spring 2000, Professor: Jonathan Cohen