

5 Network Theory

In this section we will introduce some popular families of networks and will investigate their structural properties.

5.1 Basic network topologies

The most basic network topologies used in practice are trees, cycles, grids and tori. Many other suggested networks are simply combinations or derivatives of these. The advantage of trees is that the path selection problem is very easy: for every source-destination pair there is only one possible simple path. However, since the root of a tree is usually a severe bottleneck, so-called *fat trees* have been used. These trees have the property that higher-level edges have a (much) larger capacity than lower-level edges. See Figure 1 for an example.

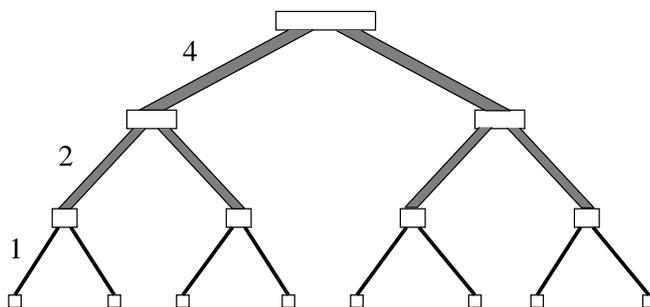


Figure 1: The structure of a fat tree.

Fat trees belong to a family of networks that require edges of non-uniform capacity to be efficient. Easier to build are networks with edges of uniform capacity. This is usually the case for grids and tori. Unless explicitly mentioned, we will treat all edges in the following to be of capacity 1. In the following, $[x]$ means the set $\{0, 1, \dots, x - 1\}$.

Definition 5.1 (Torus, Mesh) Let $m, d \in \mathbb{N}$. The (m, d) -mesh $M(m, d)$ is a graph with node set $V = [m]^d$ and edge set

$$E = \left\{ \left\{ (a_{d-1} \dots a_0), (b_{d-1} \dots b_0) \right\} \mid a_i, b_i \in [m], \sum_{i=0}^{d-1} |a_i - b_i| = 1 \right\} .$$

The (m, d) -torus $T(m, d)$ is a graph that consists of an (m, d) -mesh and additionally wrap-around edges from $(a_{d-1} \dots a_{i+1} (m - 1) a_{i-1} \dots a_0)$ to $(a_{d-1} \dots a_{i+1} 0 a_{i-1} \dots a_0)$ for all $i \in [d]$ and all $a_j \in [m]$ with $j \neq i$. $M(m, 1)$ is also called a line, $T(m, 1)$ a cycle, and $M(2, d) = T(2, d)$ a d -dimensional hypercube.

Figure 2 presents a linear array, a torus, and a hypercube.

The hypercube is a very important class of networks, and many derivatives, the so-called *hyper-cubic networks*, have been suggested for it. Among these are the butterfly, cube-connected-cycles, shuffle-exchange, and de Bruijn graph. We start with the butterfly, which is basically a rolled out version of a hypercube.

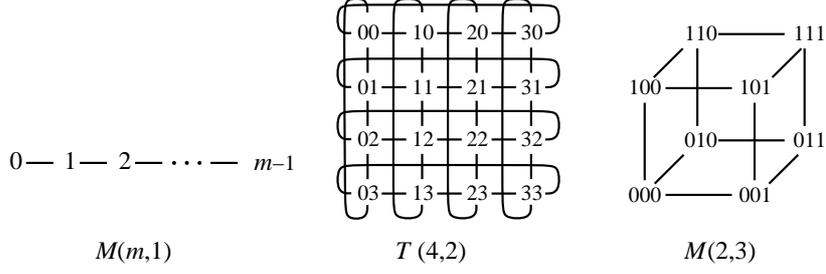


Figure 2: The structure of $M(m, 1)$, $T(4, 2)$, and $M(2, 3)$.

Definition 5.2 (Butterfly) Let $d \in \mathbb{N}$. The d -dimensional butterfly $BF(d)$ is a graph with node set $V = [d + 1] \times [2]^d$ and an edge set $E = E_1 \cup E_2$ with

$$E_1 = \{ \{(i, \alpha), (i + 1, \alpha)\} \mid i \in [d], \alpha \in [2]^d \}$$

and

$$E_2 = \{ \{(i, \alpha), (i + 1, \beta)\} \mid i \in [d], \alpha, \beta \in [2]^d, \alpha \text{ and } \beta \text{ differ only at the } i\text{th position} \} .$$

The node set $\{(i, \alpha) \mid \alpha \in [2]^d\}$ represents level i of the butterfly. The d -dimensional wrap-around butterfly $W-BF(d)$ is defined by taking the $BF(d)$ and identifying level d with level 0.

Figure 3 shows the 3-dimensional butterfly $BF(3)$. The $BF(d)$ has $(d + 1)2^d$ nodes, $2d \cdot 2^d$ edges and degree 4. It is not difficult to check that combining the node sets $\{(i, \alpha) \mid i \in [d]\}$ into a single node results in the hypercube.

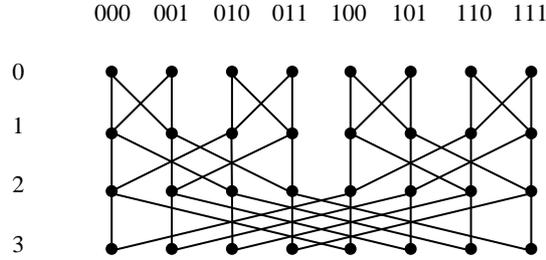


Figure 3: The structure of $BF(3)$.

Next we define the cube-connected-cycles network. It only has a degree of 3 and it results from the hypercube by replacing the corners by cycles.

Definition 5.3 (Cube-Connected-Cycles) Let $d \in \mathbb{N}$. The cube-connected-cycles network $CCC(d)$ is a graph with node set $V = \{(a, p) \mid a \in [2]^d, p \in [d]\}$ and edge set

$$E = \{ \{(a, p), (a, (p + 1) \bmod d)\} \mid a \in [2]^d, p \in [d] \} \\ \cup \{ \{(a, p), (b, p)\} \mid a, b \in [2]^d, p \in [d], a = b \text{ except for } a_p \}$$

Two possible representations of a CCC can be found in Figure 4.

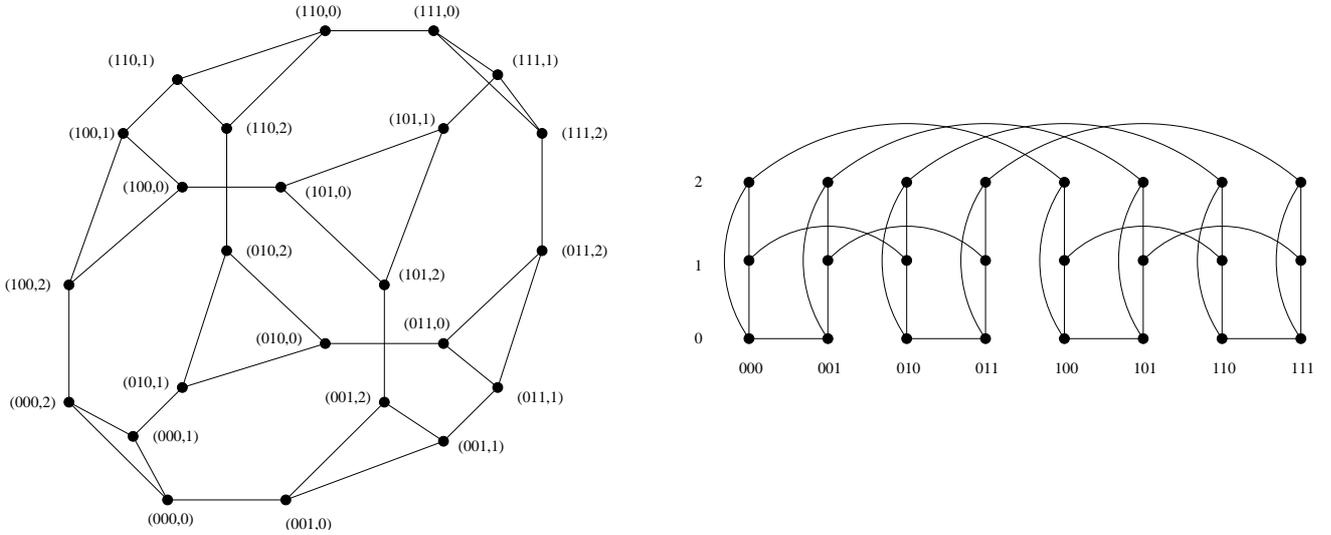


Figure 4: The structure of CCC(3).

The shuffle-exchange is yet another way of transforming the hypercubic interconnection structure into a constant degree network.

Definition 5.4 (Shuffle-Exchange) Let $d \in \mathbb{N}$. The d -dimensional shuffle-exchange $SE(d)$ is defined as an undirected graph with node set $V = [2]^d$ and an edge set $E = E_1 \cup E_2$ with

$$E_1 = \{ \{ (a_{d-1} \dots a_0), (a_{d-1} \dots \bar{a}_0) \} \mid (a_{d-1} \dots a_0) \in [2]^d, \bar{a}_0 = 1 - a_0 \}$$

and

$$E_2 = \{ \{ (a_{d-1} \dots a_0), (a_0 a_{d-1} \dots a_1) \} \mid (a_{d-1} \dots a_0) \in [2]^d \} .$$

Figure 5 shows the 3- and 4-dimensional shuffle-exchange graph.

Definition 5.5 (DeBruijn) The b -ary DeBruijn graph of dimension d $DB(b, d)$ is an undirected graph $G = (V, E)$ with node set $V = \{v \in [b]^d\}$ and edge set E that contains all edges $\{v, w\}$ with the property that $w \in \{(x, v_{d-1}, \dots, v_1) : x \in [b]\}$, where $v = (v_{d-1}, \dots, v_0)$.

Two examples of a DeBruijn graph can be found in Figure 6.

5.2 Direct and indirect networks

Networks are usually separated into *direct* and *indirect* networks. Direct networks are networks in which every node represents a processing unit that can inject and absorb packets, whereas in indirect networks only certain nodes (the so-called *input nodes*) can inject packets and certain nodes (the so-called *output nodes*) can absorb packets. An important subclass of indirect networks are the so-called leveled graphs.

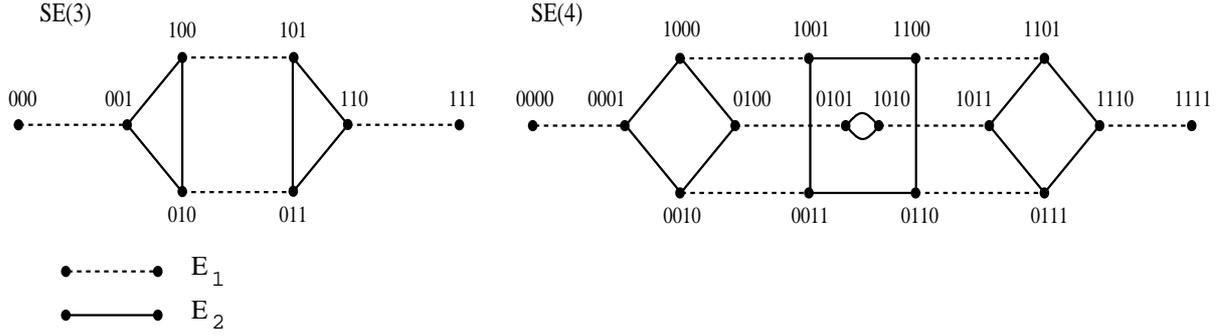


Figure 5: The structure of SE(3) and SE(4).

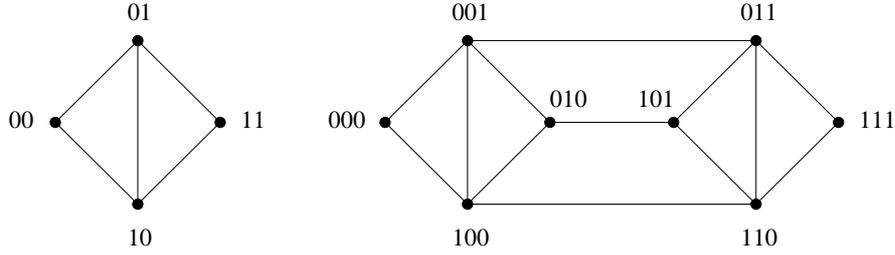


Figure 6: The structure of $DB(2, 2)$ and $DB(2, 3)$.

Definition 5.6 (Leveled Graph) A graph $G = (V, E)$ is called leveled with depth D if the nodes of G can be partitioned into $D + 1$ levels L_0, \dots, L_D such that every edge in E connects nodes of consecutive levels. Nodes in level 0 are called inputs, and nodes in level D are called outputs. If, in addition, $|L_0| = |L_D|$ and L_0 is identified with L_D , then G is called a wrapped leveled graph with depth D .

Examples of leveled graphs are the fat tree and the butterfly, and an example of a wrapped leveled graph is the wrap-around butterfly. In a butterfly it is usually assumed that the nodes in L_0 represent the input nodes and the nodes in level L_D represent the output nodes. In a fat tree the nodes in level L_D are usually both input and output nodes.

5.3 The diameter

One important goal in choosing a topology for a network is that it has a small diameter. The following theorem presents a lower bound for this.

Theorem 5.7 Every graph of maximum degree $d > 2$ and size n must have a diameter of at least $\lfloor (\log n) / (\log(d - 1)) \rfloor - 1$.

Proof. Suppose we have a graph $G = (V, E)$ of maximum degree d and size n . Start from any node $v \in V$. In a first step at most d other nodes can be reached. In two steps at most $d \cdot (d - 1)$ additional

nodes can be reached. Thus, in general, in at most k steps at most

$$1 + \sum_{i=0}^{k-1} d \cdot (d-1)^i = 1 + d \cdot \frac{(d-1)^k - 1}{(d-1) - 1} \leq \frac{d \cdot (d-1)^k}{d-2}$$

nodes (including v) can be reached. This has to be at least n to ensure that v can reach all other nodes in V within k steps. Hence,

$$(d-1)^k \geq \frac{(d-2) \cdot n}{d} \Leftrightarrow k \geq \log_{d-1}((d-2) \cdot n/d).$$

Since $\log_{d-1}((d-2)/d) > -2$ for all $d > 2$, this is true only if $k \geq \lfloor \log_{d-1} n \rfloor - 1$. \square

Theorem 5.7 uses as a construction for the lower bound a complete $(d-1)$ -ary tree with a root of degree d . However, it is easy to see that in this tree there are two nodes (see the leaves v and w in Figure 7) with a distance of approximately $2 \log_{d-1} n$, which is by a factor of 2 larger than the lower bound. Can networks with a better diameter be constructed? The next theorem gives an answer to this.

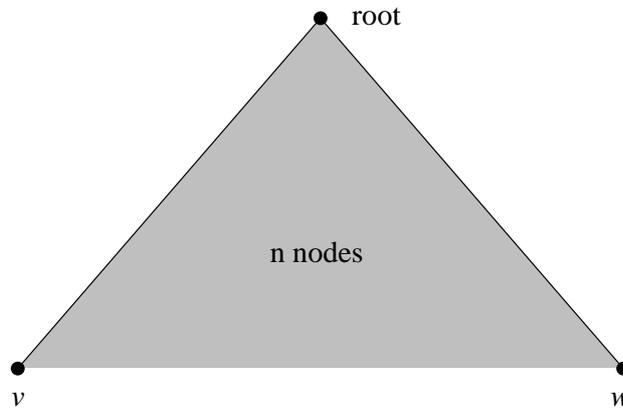


Figure 7: Nodes with highest distance in a tree.

Theorem 5.8 For every even $d > 2$ there is an infinite family of graphs G_n of maximum degree d and size n with a diameter of at most $(\log n)/(\log d - 1)$.

Proof. The proof is part of the assignment. \square

5.4 The edge expansion

Definition 5.9 Given a network $G = (V, E)$ with a non-negative capacity function c , the edge expansion α of G is defined as

$$\alpha = \min_{U \subseteq V} \frac{c(U, \bar{U})}{\min\{c(U), c(\bar{U})\}}.$$

We start with an upper bound on the edge expansion that must hold for all networks.

Theorem 5.10 *For every graph $G = (V, E)$ with non-negative edge capacities, the edge expansion can be at most 1.*

Proof. For every set $U \subseteq V$ let $E_U = \{\{v, w\} \in E \mid v \in U\}$, where an edge appears twice in E_U if both v and w are in U . Certainly, $(U, \bar{U}) \subseteq E_U$. Since $c(U) = c(E_U)$ it must therefore hold that $c(U, \bar{U}) \leq c(U)$. Equivalently, it must also hold that $c(U, \bar{U}) = c(\bar{U}, U) \leq c(\bar{U})$. Hence, $c(U, \bar{U}) \leq \min\{c(U), c(\bar{U})\}$ and therefore

$$\alpha(G) = \min_{U \subseteq V} \frac{c(U, \bar{U})}{\min\{c(U), c(\bar{U})\}} \leq 1.$$

□

Interestingly, for any $d \geq 3$ there are graphs that can achieve a constant edge expansion. These are the so-called expanders. For explicit constructions of such graphs, see, e.g., [2, 3, 4]. As one can see from these papers, it is very complicated to construct and analyze graphs that have a constant edge expansion. Also, for the classes of graphs we presented above the edge expansion is somehow complicated to compute. Therefore, we just give some results here.

Theorem 5.11 *The d -dimensional hypercube, cube-connected-cycles, butterfly, shuffle-exchange, and DeBruijn graph with uniform edge capacities all have an edge expansion of $\Theta(1/d)$.*

Using the fact that for these networks $d = \Theta(\log n)$, where n is the number of nodes in the network, it follows that all of these networks have an edge expansion of $\Theta(1/\log n)$.

Since the flow number of a network is an upper bound on its diameter, it follows from Theorem 5.14:

Corollary 5.12 *For every graph with edge expansion α the diameter is at most $O(\alpha^{-1} \log n)$.*

From Theorem 5.7 it follows that this bound is exact for constant degree expanders. However, for hypercubic networks it is off by a logarithmic factor, as will come out in the next section.

5.5 The flow number

Recall the definition of the flow number in Section 4. First, we explore the relationship of the flow number with the diameter and the expansion of a network. The first result immediately follows from the definition of F .

Fact 5.13 *For every network with diameter D and flow number F , it holds that $F \geq D$.*

The next result reveals a very close relationship between the expansion and the flow number of a network. It can be seen as a min-cut max-flow theorem for the flow problem \mathcal{B} that defines F , because α is defined via cuts whereas F is defined via flows.

Theorem 5.14 *For any network G with edge expansion α and flow number F it holds that*

$$\alpha^{-1} \leq F \leq c \cdot \alpha^{-1} \log n$$

for some constant c .

Proof. We only prove here that $F \geq \alpha^{-1}$. (The entire proof can be found in the lecture notes of last year.) For this we need some notation. Given a concurrent multicommodity flow problem, the *cut ratio* of a cut (U, \bar{U}) is defined as

$$R_U = \frac{c(U, \bar{U})}{d(U, \bar{U})} \quad \text{where} \quad d(U, \bar{U}) = \sum_{(s_i, t_i) \in (U \times \bar{U}) \cup (\bar{U} \times U)} d_i.$$

Now, let f be the concurrent max-flow of the problem \mathcal{B} used for the definition of F . Consider any cut (U, \bar{U}) and let i_1, i_2, \dots, i_r denote the commodities whose source and target are separated by this cut. Since all flows for these commodities must cross (U, \bar{U}) , we know that

$$\sum_{j=1}^r f \cdot d_{i_j} \leq c(U, \bar{U}).$$

Since $\sum_{j=1}^r d_{i_j} = d(U, \bar{U})$, this means that

$$f \leq \frac{c(U, \bar{U})}{d(U, \bar{U})}.$$

For \mathcal{B} it holds that

$$d(U, \bar{U}) = \sum_{(u,v) \in (U \times \bar{U}) \cup (\bar{U} \times U)} \frac{c(u) \cdot c(v)}{c(V)} = \frac{2c(U) \cdot c(\bar{U})}{c(V)}.$$

We distinguish between two cases. If $c(U) \geq c(V)/2$, then $c(U) \cdot c(\bar{U})/c(V) \geq c(\bar{U})/2$. Thus,

$$f \leq \frac{c(U, \bar{U})}{2 \cdot c(\bar{U})/2} = \frac{c(U, \bar{U})}{\min\{c(U), c(\bar{U})\}}.$$

If $c(\bar{U}) \geq c(V)/2$, then $c(U) \cdot c(\bar{U})/c(V) \geq c(U)/2$ and therefore

$$f \leq \frac{c(U, \bar{U})}{2 \cdot c(U)/2} = \frac{c(U, \bar{U})}{\min\{c(U), c(\bar{U})\}}.$$

Hence, in both cases,

$$f \leq \frac{c(U, \bar{U})}{\min\{c(U), c(\bar{U})\}}$$

and therefore $f \leq \alpha$ or $1/f \geq \alpha^{-1}$. Since according to the definition of F , $F \geq 1/f$, it follows that $F \geq \alpha^{-1}$. \square

Do there exist networks where the flow number is in $O(\max\{D, \alpha^{-1}\})$? The next theorem lists some.

Theorem 5.15 *The d -dimensional hypercube, cube-connected-cycles, butterfly, shuffle-exchange, and DeBruijn graph with uniform edge capacities all have a flow number of $\Theta(d)$.*

For proofs see, for example, [1] or [5]. Thus, for these networks it actually holds that $F = \Theta(\alpha^{-1})$, i.e. the edge expansion describes very well the routing ability of the network. It also follows from the bound that all must have a diameter of $O(\log n)$.

References

- [1] F. Leighton. *Introduction to Parallel Algorithms and Architectures: Arrays · Trees · Hypercubes*. Morgan Kaufmann Publishers (San Mateo, CA), 1992.
- [2] A. Lubotzky, R. Phillips, and R. Sarnak. Ramanujan graphs. *Combinatorica*, 8(3):261–277, 1988.
- [3] G. Margulis. Explicit group theoretical constructions of combinatorial schemes and their application to the design of expanders and superconcentrators. *Problems Inform. Transmission*, 11:39–46, 1988.
- [4] M. Morgenstern. Existence and explicit constructions of $q + 1$ regular Ramanujan graphs for every prime power q . *Journal of Combinatorial Theory, Series B*, 62:44–62, 1994.
- [5] C. Scheideler. *Universal Routing Strategies for Interconnection Networks*, volume 1390 of *Lecture Notes in Computer Science*. Springer, 1998.